


## MB 20+4Pin

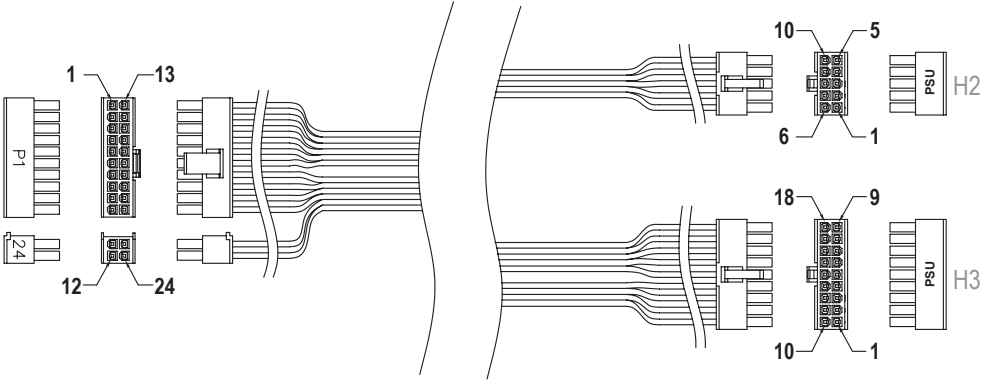

H1

PIN	Rating	PIN	Rating	PIN	Rating
1	+3.3V	8	PW_OK	16	PS_ON
2	+3.3Vs	9	+5Vsb	17	COM
3	+3.3V	10	+12V	18	COM
4	COM	11	+12Vs	19	COM
5	+5V	12	+12V	20	NC
6	COM	13	+3.3V	21	+5V
7	+5Vs	14	+3.3V	22	+5V
		15	-12V	23	+5V
				24	COM


H2

PIN	Rating
1	+3.3V
2	+3.3V
3	+3.3V
4	
5	COM
6	+3.3V
7	+12V
8	+12V
9	-12V
10	COM

H3

PIN	Rating	PIN	Rating
1	PS_ON	10	PW_OK
2	+3.3Vs	11	+5Vsb
3	+5Vs	12	COM
4	+12Vs	13	
5	+5Vs	14	+5V
6	+5V	15	+5V
7	+5V	16	COM
8	COM	17	COM
9	COM	18	COM

## CPU 4+4Pin

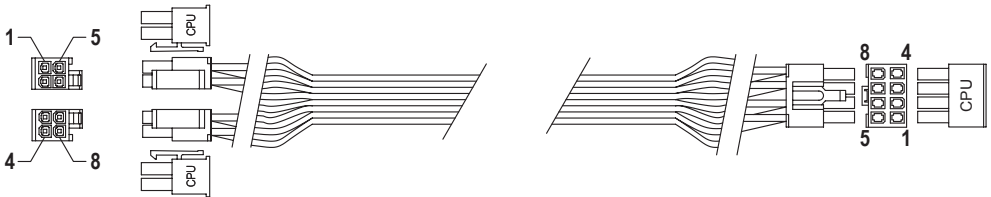


H1

PIN	Rating	PIN	Rating
1	COM	5	+12V
2	COM	6	+12V
3	COM	7	+12V
4	COM	8	+12V


H2

PIN	Rating	PIN	Rating
1	COM	5	+12V
2	COM	6	+12V
3	COM	7	+12V
4	COM	8	+12V

# PCI-e 6+2Pin

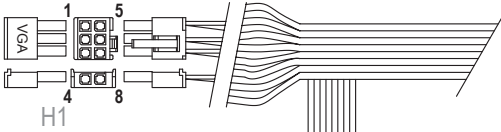


PIN	Rating	PIN	Rating
1	+12V	5	COM
2	+12V	6	COM
3	+12V	7	COM
4	COM	8	COM

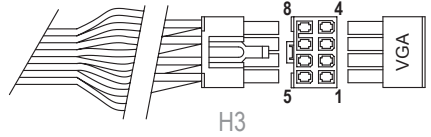


PIN	Rating	PIN	Rating
1	+12V	5	COM
2	+12V	6	COM
3	+12V	7	COM
4	COM	8	COM

H2

PIN	Rating	PIN	Rating
1	+12V	5	COM
2	+12V	6	COM
3	+12V	7	COM
4	COM	8	COM



# Peripheral

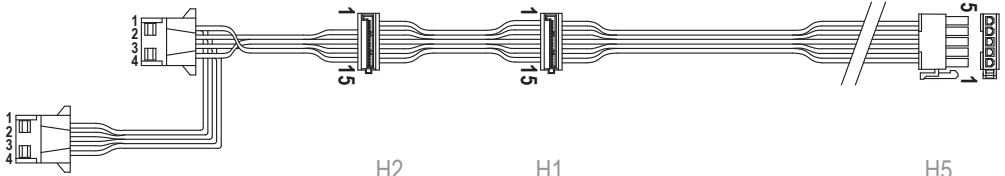


PIN	Rating
1	+12V
2	COM
3	COM
4	+5V

PIN	Rating
1	+12V
2	COM
3	COM
4	+5V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1	+12V
2	COM
3	+5V
4	COM
5	+3.3V

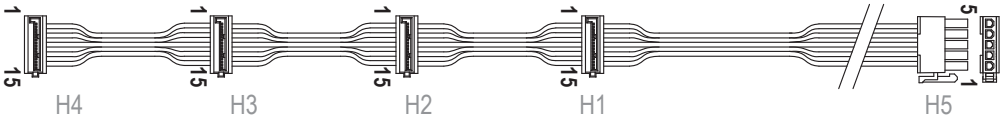


PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1	+12V
2	COM
3	+5V
4	COM
5	+3.3V

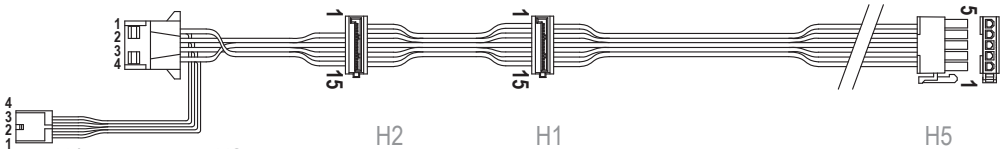

PIN	Rating
1	+5V
2	COM
3	COM
4	+12V

PIN	Rating
1	+12V
2	COM
3	COM
4	+5V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1-3	+3.3V
4-6	COM
7-9	+5V
10-12	COM
13-15	+12V

PIN	Rating
1	+12V
2	COM
3	+5V
4	COM
5	+3.3V